


Polymer Systems Technology Limited

UK & Ireland Distributor



© 2012 - Polymer Systems Technology Limited TM
Unit 2. Network 4. Cressex Business Park,
Lincoln Road, High Wycombe, Bucks. HP12 3RF
Phone +44 (0) 1494 446610
Fax: +44 (0) 1494 528611
Web: <http://www.siliconepolymers.co.uk>
Email: sales@silicone-polymers.co.uk

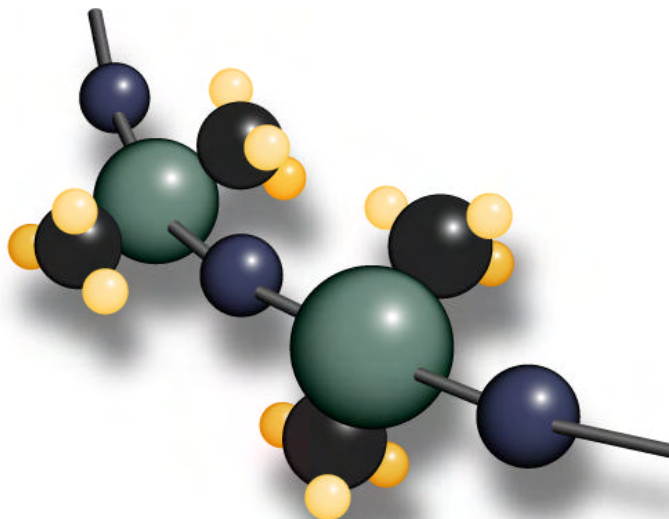

EPM-2422

Low Volatility Silicone Elastomer

NuSil Technology LLC
 1050 Cindy Lane • Carpinteria, CA 93013
 805/684-8780 • 805/566-9905 Fax
 www.nusil.com • silicone@nusil.com

An ISO 9001 and AS9100
 Certified Company

Description

- Two-part, low viscosity clear RTV silicone
- Designed for enhanced performance in extreme low and high temperatures
- 10:1 Mix Ratio (Part A: Part B)

Applications

- To provide protection of electric components and assemblies against shock, vibration, moisture, dust, chemicals and other environmental hazards
- Low viscosity for applications requiring superior flow

Properties	Average Result	ASTM	NT-TM
Uncured:			
Appearance*	Transparent	D2090	002
Viscosity, Part A*	3,600 cP (3,600 mPas)	D1084, D2196	001
Cured: 4 hours @ 65°C (149°F)			
Specific Gravity*	1.04	D792	003
Durometer, Type A*	40	D2240	006
Tensile Strength*	650 psi (4.5 MPa)	D412	007
Elongation*	100%	D412	007
Lap Shear Strength* (primed w/CF1-135)	200 psi (1.4 MPa)	D1002	010
Coefficient of Linear Expansion			
Below Tg (-150° to -115 °C)	10 ppm/°C (10 µm/m/°C)	-	-
Above Tg (-95°C to 250°C)	490 ppm/°C (490 µm/m/°C)	-	-
Dynamic Mechanical Analysis (DMA)	See attached graph	E1640	-
Volatile Content (1 hour @ 275°C)	0.2%	D2288	004
Ionic Content, Cl	< 5 ppm	-	-
Ionic Content, K	< 1 ppm	-	-
Ionic Content, Na	< 1 ppm	-	-

*Properties tested on a lot-to-lot basis. Do not use the properties shown in this technical profile as a basis for preparing specifications. Please contact NuSil Technology for assistance and recommendations in establishing particular specifications.

Instructions for Use

Mixing

Thoroughly mix Part A and Part B in a 10:1 mix ratio by weight prior to use.

Vacuum Deaeration

Remove air entrapped during mixing by common vacuum deaeration procedure, observing all applicable safety precautions. Slowly apply full vacuum to a container rated for use and at least four times the volume of the material being deaerated. Hold vacuum until bulk deaeration is complete.

Note: Some bonding applications may require the use of a primer. NuSil Technology's CF1-135 is recommended.

Substrate Considerations

Cures in contact with most materials, exceptions include: sulfur-cured organic rubbers, latex, chlorinated rubbers, some RTV silicones and unreacted residues of some curing agents.

Packaging

37 mL SxS Kit
 50 Gram Kit
 100 Gram Kit
 500 Gram Kit

Warranty

6 Months

Adjustable Cure Schedule


Product cures at a wide range of cure times and temperatures to accommodate different production needs. Contact NuSil Technology for details.

Operating Temperature

The operating temperature range of a silicone in any application is dependent on many variables, including but not limited to: temperature, time of exposure, type of atmosphere, exposure of the material's surface to the atmosphere, and mechanical stress. In addition, a material's physical properties will vary at both the high and low end of the operating temperature range. This type of silicone typically remains flexible at extremely low temperatures and has been known to perform at -140°C (-220°F) as well as resist breakdown at elevated temperatures up to 300°C (572°F). The user is responsible to verify performance of a material in a specific application.

Dynamic Mechanical Analysis (DMA) ASTM D-4065-01

	Tg	E' @ -150°C	E' @ 100°C	Max and Min Tan Delta above Tg
EPM-2422	-108°C	12,100 MPa	30 MPa	0.6 – 0.004

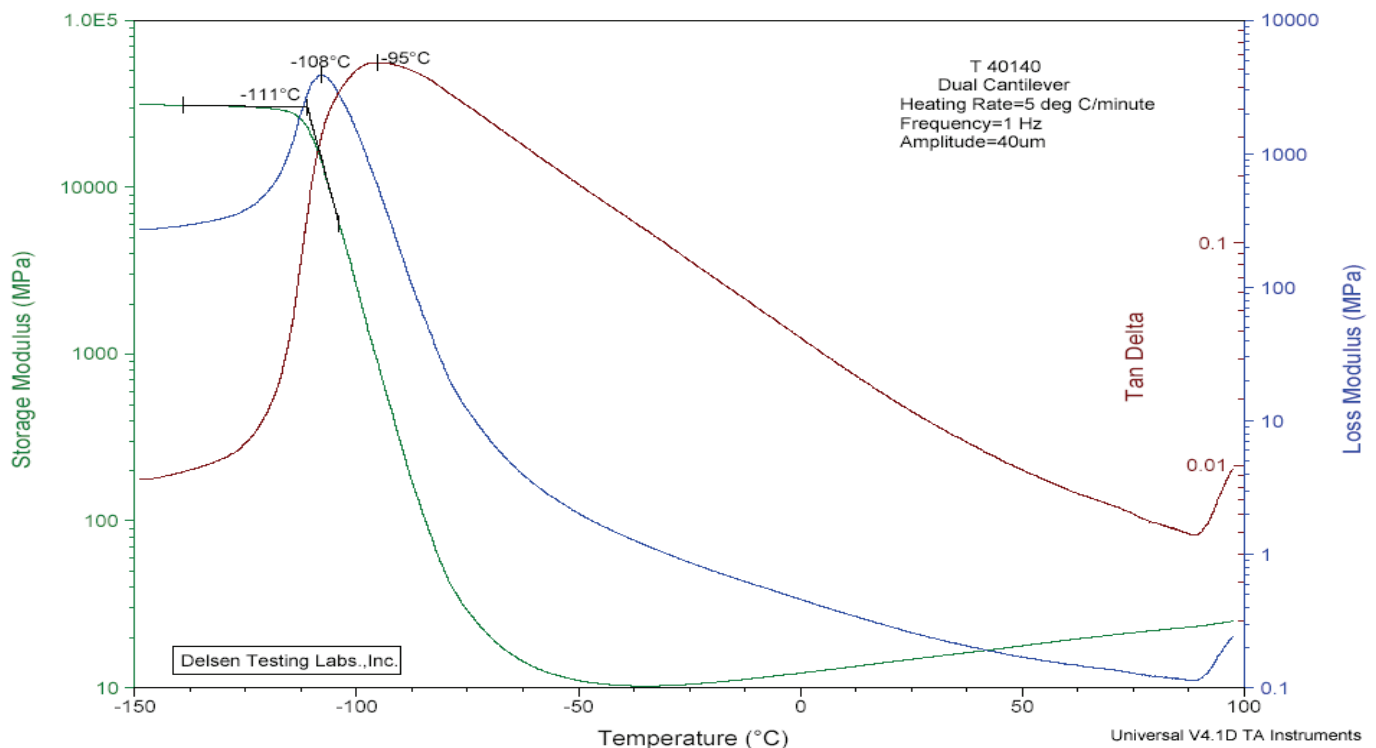

RoHS and REACH Compliance

EPM-2422 is compliant with the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) regulation contained in Article 4(1) of the European Parliament and Council's Directive 2002/95/EC. RoHS mandates that manufacturers restrict the use of lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls, polychlorinated biphenyls, and polybrominated diphenyl ethers in electrical and electronic equipment.

EPM-2422 is also compliant with the Registration, Evaluation, and Authorization of Chemicals (REACH) regulation (European Union 1907/2006). EPM-2422 does not contain any of the 16 chemicals identified as Substances of Very High Concern (SVHC) by the European Chemicals Agency (ECHA), which oversees REACH compliance.

Please contact NuSil Technology's Regulatory Compliance department with any questions or for further assistance.

Specifications

Do not use the properties shown in this technical profile as a basis for preparing specifications. Please contact NuSil Technology for assistance and recommendations in establishing particular specifications.

Warranty Information

The warranty period provided by NuSil Technology LLC (hereinafter "NuSil Technology") is 6 months from the date of shipment when stored below 40°C in original unopened containers. Unless NuSil Technology provides a specific written warranty of fitness for a particular use, NuSil Technology's sole warranty is that the product will meet NuSil Technology's then current specification. NuSil Technology specifically disclaims all other expressed or implied warranties, including, but not limited to, warranties of merchantability and fitness for use. The exclusive remedy and NuSil Technology's sole liability for breach of warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. NuSil Technology expressly disclaims any liability for incidental or consequential damages.

Warnings About Product Safety

NuSil Technology believes, to the best of its knowledge, that the information and data contained herein are accurate and reliable. The user is responsible to determine the material's suitability and safety of use. NuSil Technology cannot know each application's specific requirements and hereby notifies the user that it has not tested or determined this material's suitability or safety for use in any application. The user is responsible to adequately test and determine the safety and suitability for their application and NuSil Technology makes no warranty concerning fitness for any use or purpose. NuSil Technology has completed no testing to establish safety of use in any medical application.

NuSil Technology has tested this material only to determine if the product meets the applicable specifications. (Please contact NuSil Technology for assistance and recommendations when establishing specifications.) When considering the use of NuSil Technology products in a particular application, review the latest Material Safety Data Sheet and contact NuSil Technology with any questions about product safety information.

Do not use any chemical in a food, drug, cosmetic, or medical application or process until having determined the safety and legality of the use. The user is responsible to meet the requirements of the U.S. Food and Drug Administration (FDA) and any other regulatory agencies. Before handling any other materials mentioned in the text, the user is advised to obtain available product safety information and take the necessary steps to ensure safety of use.

Patent / Intellectual Property Warning

NuSil Technology disclaims any expressed or implied warranty against the infringement of any domestic or international patent/intellectual property right. NuSil Technology does not warrant the use or sale of the products described herein will not infringe the claims of any domestic or international patent/intellectual property right covering the product itself, its use in combination with other products, or its use in the operation of any process.